



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET:

#100-B SHALLOW DOVETAIL ANCHOR SLOT

Standard Size: 7/8" wide x 1/2" deep x 5/8" throat with nail holes 12" o.c.. in 10 foot lengths. Foam Filled. Available in 20 gage Mill Galvanized and Stainless Steel.

(For Anchors add the suffix "B" to the Heckmann Anchor Catalog Number i.e. 106-B to designate the smaller Dovetail Size.)

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

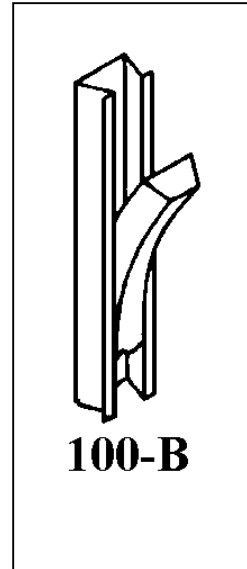

Approvals:

Comments:

