



# Heckmann Building Products Inc.

1501 N. 31<sup>st</sup> Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

[www.heckmannbuildingprods.com](http://www.heckmannbuildingprods.com)


SUBMITTAL SHEET:

## No. 1007 HEMMED DRIP-EDGE FLASHING

**Description:** Used as flashing material to prevent water damage. Drip-edge is folded back to prevent sharp edge on exterior of wall.

**Standard Size:** 26 gage Stainless Steel 1-1/2" across with a 45° 1/2" drip-edge hemmed back 3/8" in 10 foot Lengths

Custom sizes and lengths are available. Specify overall length (10 ft maximum), gage, type of steel (Stainless, Mill Galvanized, Copper), length of flat portion, and length and angle degree of drip. The hem will be 1/8" back from the bend.

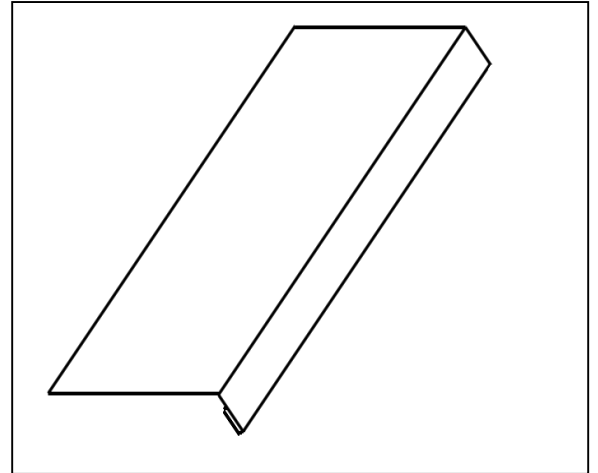

### Heckmann Steel Specifications

#### Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

#### Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

#### Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

#### Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

Approvals:

Comments: