



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: NO. 259-W CORRUGATED DOUBLE ANCHOR

Standards: 14 gage x 2-1/2" wide in lengths of 3", 5" or 7". Available in Mill Galvanized, Hotdip Galvanized After Fabrication, and Stainless Steel.

Use #282 Double Pintle Wire Tie for the adjustable anchor section.

Install No. 259-W in a block wall with the hole end extending out from the block wall to the desired distance for insulation. The adjustable pintles of the Double Pintle Wire Tie should not extend beyond 1 1/4" from the plane of the two anchors.

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

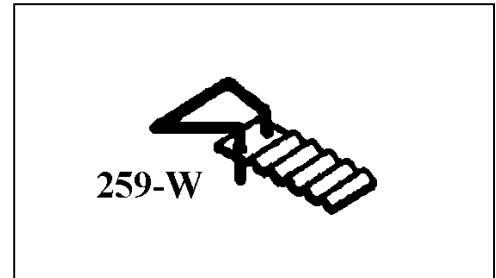

Approvals:

Comments: