



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911


800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: #353 DEBONDED SHEAR ANCHOR

Allows expansion and contraction in a masonry wall. Resists out-of-plane shear forces while allowing for in-plane movement of the masonry.

Standard Size: 22 gage x 1-1/2" wide x 10" long. Available in Mill Galvanized Steel, Hotdip Galvanized After Fabrication or Stainless Steel.

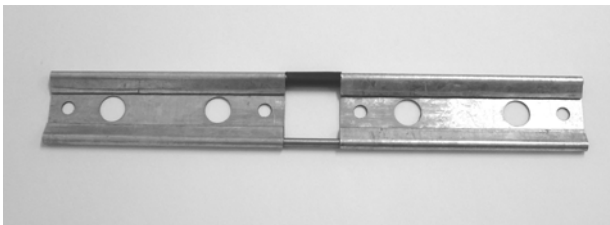

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Approvals:

Comments: