



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640


www.heckmannanchors.com

SUBMITTAL SHEET: #378 DOUBLE RESTRAINING WIRE REBAR POSITIONER

Positions rebar horizontally in cell of CMU.

Standard Sizes: Manufactured from 9 gage wire for
6", 8", 10" and 12" block.

Available in Hotdip Galvanized After Fabrication and
Mill Galvanized.

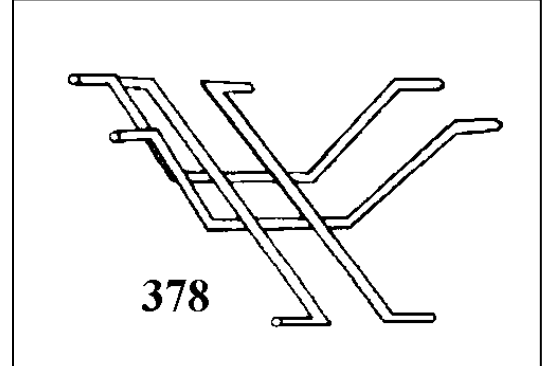

Mill Galvanized:

Wire: ASTM A 641 (0.1 oz/ft²)

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Approvals:

Comments: