



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannanchors.com


SUBMITTAL SHEET: #98 CRACK CONTROL JOINT

Specify: Gage: 24, 22, 20, 18, or 16 gage.

Width: Standard width is 2 3/4" wide.

Opening: Centered in joint width. Opening V-dimension is 3/4" wide x 3/8" deep.

Steel Type: Usually ordered in Mill Galvanized but is available in Stainless Steel or 16 ounce Copper for corrosive environments and special conditions.

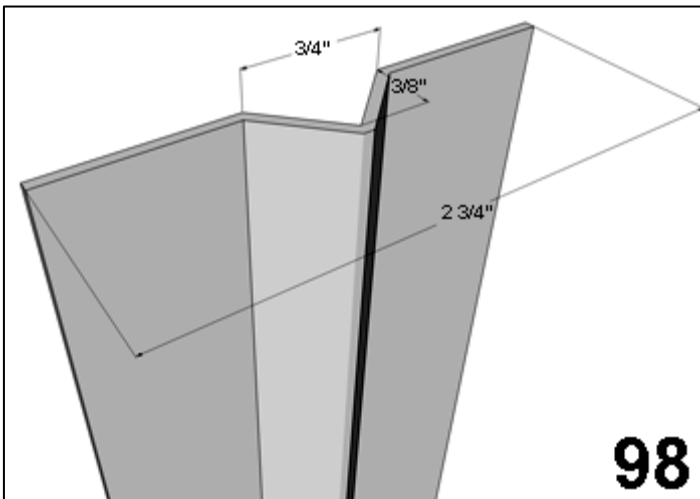

Stainless Steel:

ASTM A 167 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized:

ASTM A 653 G60

Plain Steel:

ASTM A 569, ASTM A 366.

Approvals:

Comments: