



Heckmann Building Products Inc.

1501 N. 31st Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

www.heckmannbuildingprods.com

SUBMITTAL SHEET: TERMINATION BAR (T-BAR)

Standard Size: 1/8" x 1-1/4" wide x 8 Feet Long with 5/16" diameter holes every 12" o.c. starting 6" from the end. Stainless Steel, Mill galvanized

Used to secure flashing to an existing wall. Start fastening at one end of the bar and proceed to the next hole to avoid bowing. Apply a sealant to the top edge of the bar and feather.

Custom sizes, widths, and steel types are available. Holes can be spaced 16" or 24" o.c. (Steel types should match the steel type of your flashing to avoid galvanic reaction.)

Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

Hotdip Galvanized:

ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized:

Sheet metal anchors and ties: ASTM A 653 G60


Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Steel:

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.

Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

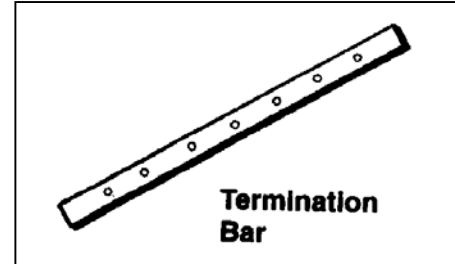

Approvals:

Comments: