HECKMANN™ Building Products
Div. of Mechanical Plastics Corp.
www.heckmannanchors.com

Submittal Sheet
#103-C Dovetail Triangular Veneer Anchor

Used for attaching brick veneer to an existing wall with a mechanical fastener or install into #100 Dovetail Anchor Slot.

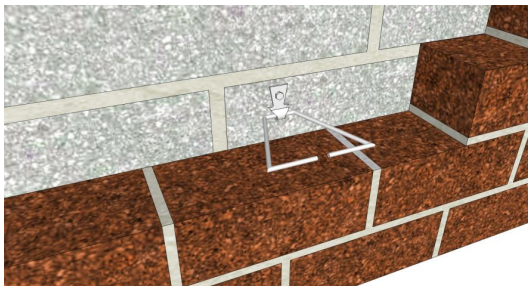

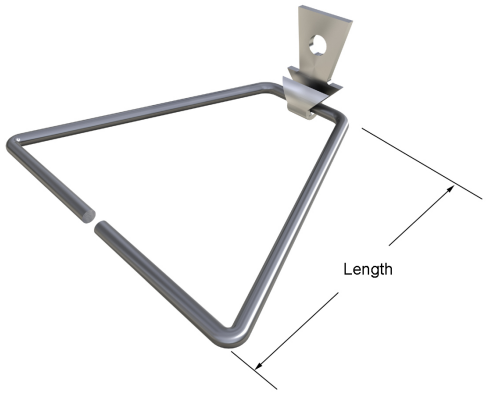

Standards:

Thickness: 14 gage clip with 3/16” diameter wire ties

Finish: ○ Stainless type 304 ○ Mill Galvanized
○ Hotdip Gavanized after Fabrication

Length ○ 3” ○ 4" ○ 5" ○ 6" ○ 7" ○ 9" ○ 11"

○ Custom Length:

Hole Size: 5/16”

Quantity:

Print

Reset Form

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
Wire ties and anchors: ASTM A 580 AISI Type 304
(AISI Type 316 available upon request)
Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft^2.)(0.46kg/m^2)
Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
Wire: ASTM A 641 (0.1 oz/ ft^2.)
Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

110 Richards Avenue
Norwak, CT 06854-1685 USA
Phone: 800-621-4140
info@heckmannanchors.com
www.heckmannanchors.com