
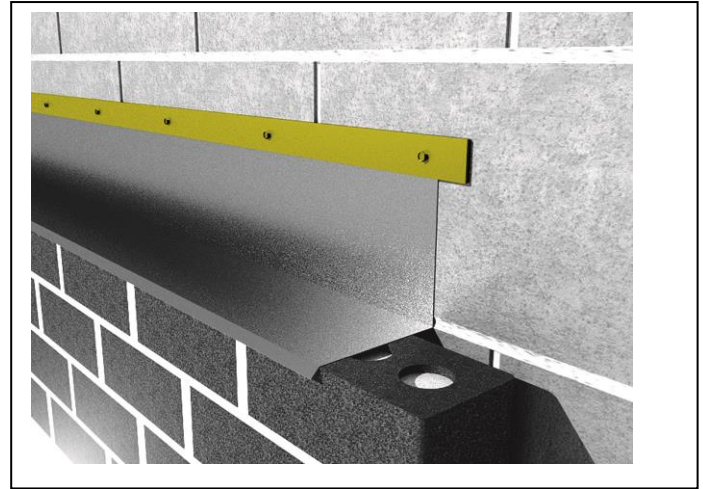


**Submittal Sheet**  
**#1050 – Termination Bar (T-Bar)**

Termination bars are used to secure flashing to a backup wall. Start fastening at one end of the bar and proceed to the next hole to avoid bowing. Apply a sealant to the top edge of the bar and feather.

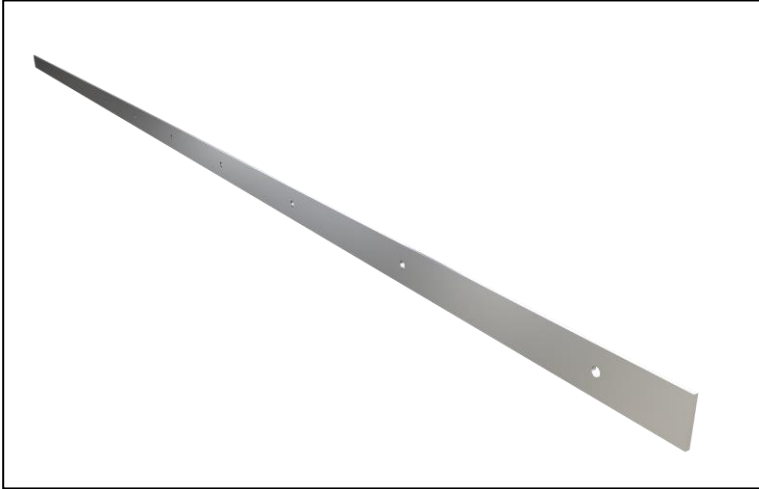

**STANDARD      SPECIAL**

**Standards:**

Select	Catalog No.	Thickness	Width (in.)	Length (ft)	Material
<input type="checkbox"/>	1050P8125	1/8	1	8'	Plastic
<input type="checkbox"/>	1050A140	14 gage	1	8'	Aluminum no lip
<input type="checkbox"/>	1050A148	14 gage	1	8'	Aluminum with lip
<input type="checkbox"/>	1050S8125	1/8	1	8'	Stainless no lip
<input type="checkbox"/>	1050S826	26 ga	1 1/2	8'	Stainless with lip

**Specials:**

Thickness:  1/8"  12 gage  14 gage  16 gage      Length: \_\_\_\_\_      Width: \_\_\_\_\_

Hole diameter: \_\_\_\_\_      On Center Hole Spacing: \_\_\_\_\_      Holes start \_\_\_\_\_ inches from end.

Steel Type:      Type 304 Stainless Steel      Mill Galvanized

Quantity (pcs) \_\_\_\_\_

**Material Specifications**

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.  
(AISI Type 316 available upon request)