
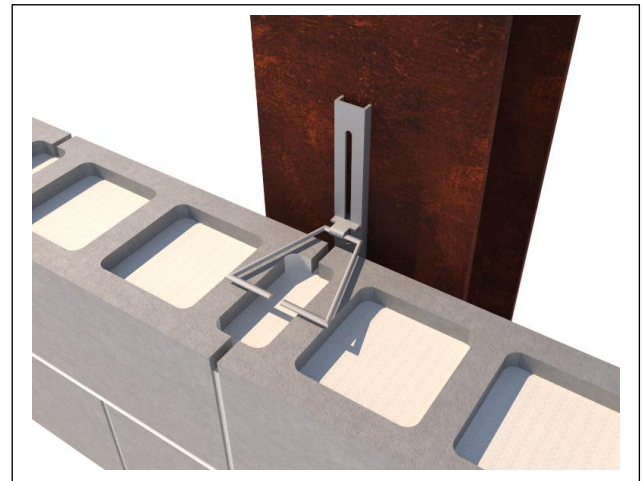


Submittal Sheet
#129 Channel Slot Triangular Wire Tie

Used for attaching brick veneer or block to backup walls that have Channel Slots installed.

(See #130 Weld-On Channel Slots, #131 Built-In Channel Slots, #132 Screw-In Channel Slots, #133 Long Channel Slots)

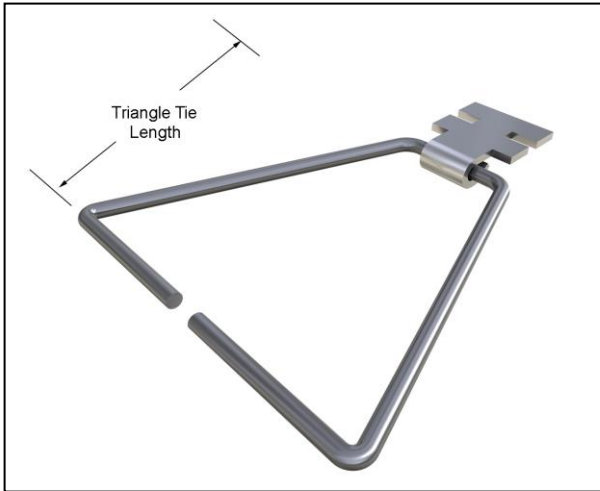

Standards:

Clip Thickness: 12 gage x 1-1/4" wide

Triangle Tie 3/16" diameter

Triangle Tie Lengths: 3" 4" 5" 7" 9" 11"

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304
(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2:
(1.50 oz/ ft².) (0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M
Structural Steel ASTM A36/A36M-08
Wire: ASTM A 82/A82M Tensile Strengths
80,000 psi Yield Point 70,000 psi