



Submittal Sheet
#1300 Ladder Pintle Eye
Wire Reinforcement

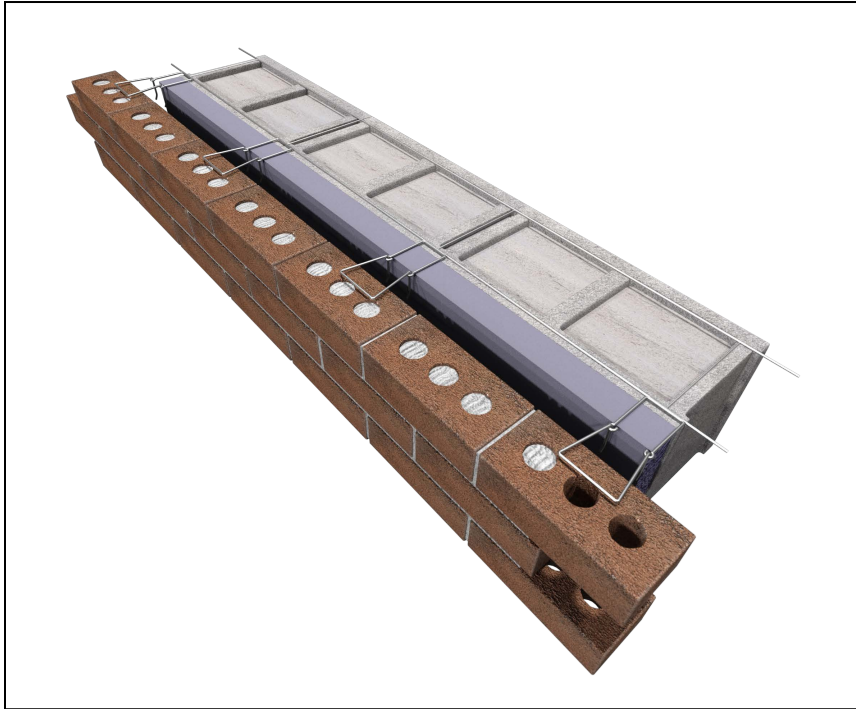

Pintle wire eyes are spaced 16" o.c. and conform to the TMS 402 Building Code.

Wire deformations 8 sets per inch in compliance with ASTM A951.

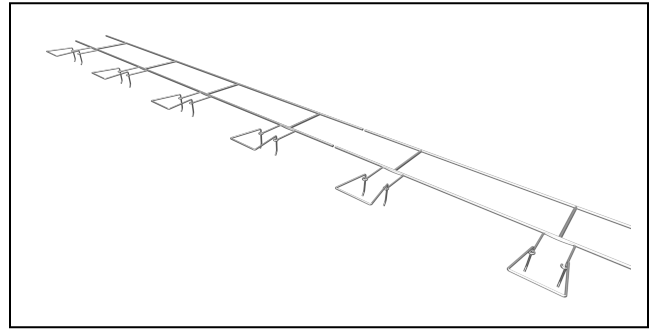

Available in 10 ft lengths

	Wire Size	Side Rods	Cross Rods
	Standard	9 gage	9 gage
	Heavy Duty	3/16"	9 gage
	Extra Heavy Duty	3/16"	3/16"

	CMU Size
	4"
	6"
	8"
	10"
	12"

	Steel Type
	Mill Galvanized
	Hotdip Galvanized
	Stainless Steel

	Pintle Lengths
	3-1/4"
	4-1/4"
	5-1/4"

Quantity in Lineal Feet: _____

Material Specifications

ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)

Stainless Steel: Wire: ASTM A 580 AISI Type 304 (AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: Wire: ASTM A1064/A1064M, ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi