
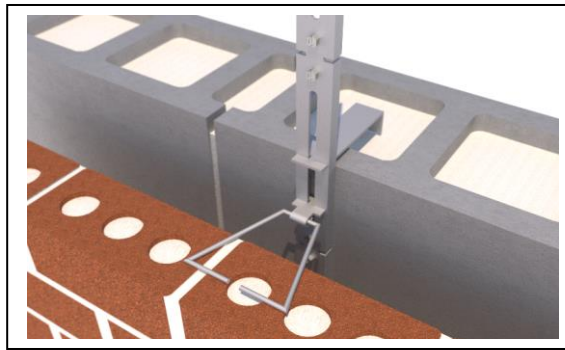
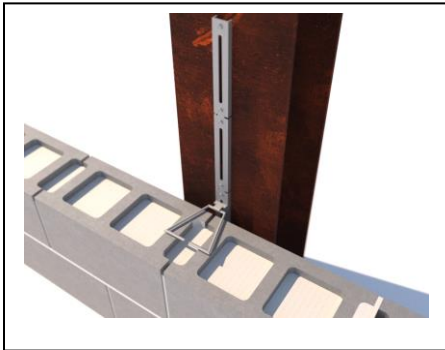


Used to attach Brick or Stone Veneers to a new or existing Brick, CMU, or Concrete wall.

Use #133-P Bridge Plates (optional) as a conforming washer along with an expansion anchor to attach to existing walls or use the 5/16" diameter holes factory punched into the channel slots. Use #129, #138, or #134 anchors reversed to attach to new CMU wall. Long Channel Slots can also be welded to steel beams.

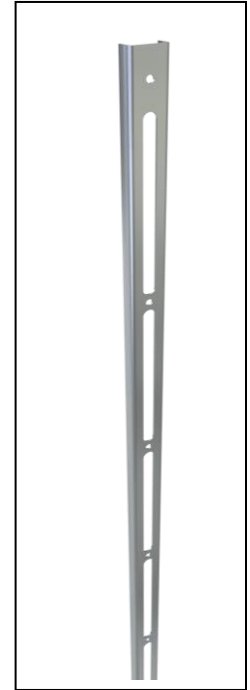

Standards:

Thickness: 12 gage 14 gage 16 gage

Length: 5 feet 10 feet

Width 1-3/8"

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Plain Steel

Slots are 1/2" x 7-3/8" with 3/4" between slots. 5 ft. lengths have 7 slots and 10 ft. lengths have 14 slots.

Quantity (lin ft): _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08