


# Submittal Sheet

## #134 Channel Slot

### Corrugated Anchor

Used to attach brick veneer to backup with Channel Slots. (See #130, #132, or #133 Channel Slots)

Also Available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor

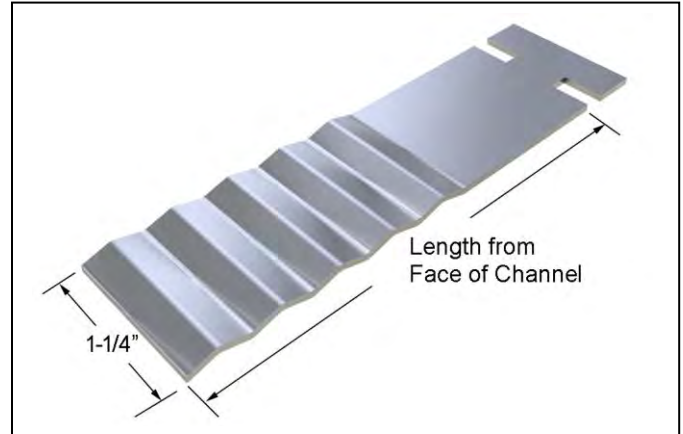

#### Standards:

Thickness: 16 gage      Width: 1-1/4"

Length from face of channel:  3 1/2"  5 1/2"  7 1/2" other

#### Specials:

Thickness:  3/16"   1/8"   12 gage   14 gage   16 gage

Length (minimum 1-1/2"): \_\_\_\_\_

Width: 1-1/4"

Finish:  Stainless type 304    Hot Dip Galvanized  
 Mill Galvanized    Zinc Alloy 710  
(1/8 only)

Quantity: \_\_\_\_\_

#### Material Specifications

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

**Firewall Anchors:** Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" only)