HECKMANN™ Building Products
Div. of Mechanical Plastics Corp.
www.heckmannanchors.com

Submittal Sheet
#135 Channel Slot Stone Anchor

Used to attach stone to backup wall with attached Channel Slots. (See #130, #131, #132, or #133 Channel Slots)

Also Available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor.

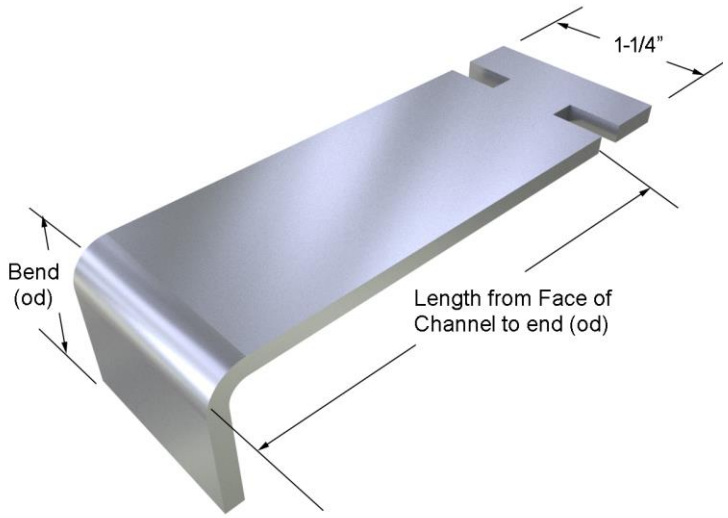

Made to Order:

Thickness: ○ 3/16" ○ 1/8" ○ 12 gage ○ 14 gage ○ 16 gage

Width: 1-1/4"

Length from face of channel (od): _____

Bend Length (od): _____

Finish: ○ Stainless type 304 ○ Hot Dip Galvanized ○ Mill Galvanized ○ Zinc Alloy 710

Quantity: _____

Print

Reset Form

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
(AISI Type 316 available upon request)
Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ft^2.)(0.46kg/m^2)
Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
Firewall Anchors: Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)

110 Richards Avenue
Norwalk, CT 06854-1685 USA
Phone 800-621-4140
Revised October 2020
info@heckmannanchors.com
www.heckmannanchors.com