


Submittal Sheet
#136 Channel Slot Split-Bend Stone Anchor

Used to attach stones to backup with Channel Slots. (See #130, #131, #132, or #133 Channel Slots)

Also available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor

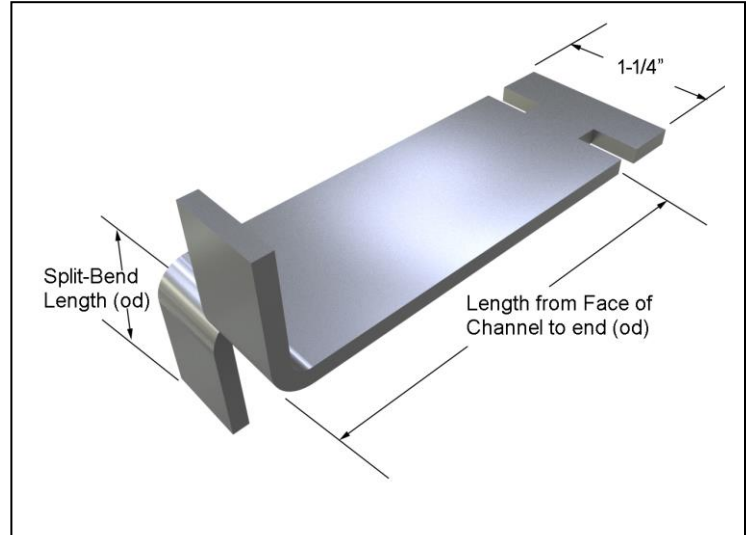

Made to Order:

Thickness: 3/16" 1/8" 12 gage
 14 gage 16 gage

Width: 1-1/4"

Length from face of channel (od): _____

Split-Bend Length (od): _____

Finish: Stainless type 304
 Hot Dip Galvanized
 Mill Galvanized
 Zinc Alloy 710

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Firewall Anchors: Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)