


Submittal Sheet
#137 Channel Slot Pin Stone Anchor

Used to attach stone to a backup wall with Channel Slots. (See #130, #131, #132, or #133 Channel Slots)

Pins are available loose or welded in place. Pins furnished loose allow the stone installer to use the anchor as a template for drilling his hole into the stone.

Hole Location: Specify as distance from end of anchor to center of hole. Hole is 1/16" larger than the diameter of the pin.

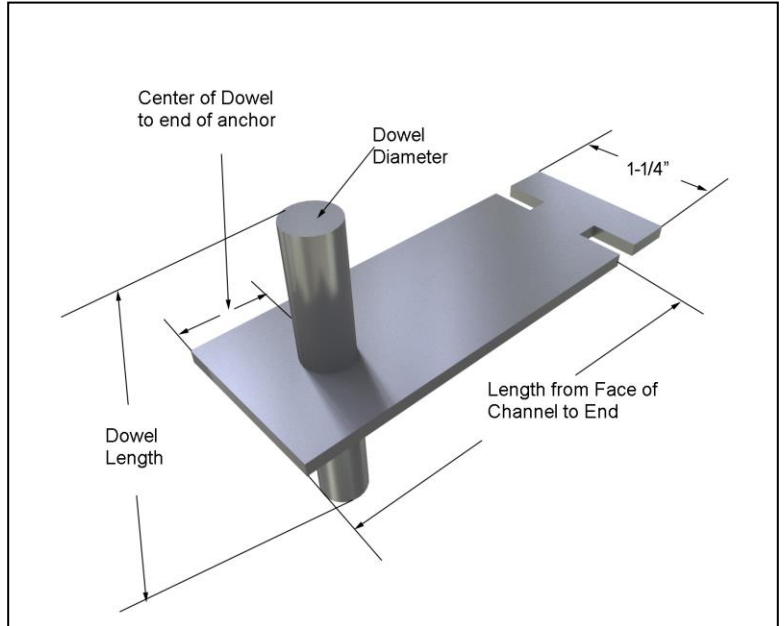

Made to Order:

Thickness: 3/16" 1/8" 12 gage
 14 gage 16 gage

Length from face of channel: _____

Width: 1-1/4"

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Zinc Alloy 710
(1/8" and 16 ga only)

Center of Dowel to end of anchor: _____

Pin

Diameter: 1/4" 3/8" 1/2" 5/8" 3/4"

Pin Length: _____ Loose Welded

Quantity: _____

(Zinc Alloy 710 pins cannot be welded)

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi