


**Submittal Sheet**  
**#138 Channel Slot**  
**Flat Anchor**

Used for anchoring stone to backup with Channel Slots. (See #130, #132, or #133 Channel Slots). Flat part is usually field bent or drilled. Also used as a masonry wall stabilizing anchor for resisting lateral loads at the top of masonry walls with steel beams overhead. Use with #130 channel slots and #422 Plastic Rectangle Tube.

Also Available in #710 Zinc Alloy in 1/8" thick and 16 gage for use as a firewall melt-away anchor

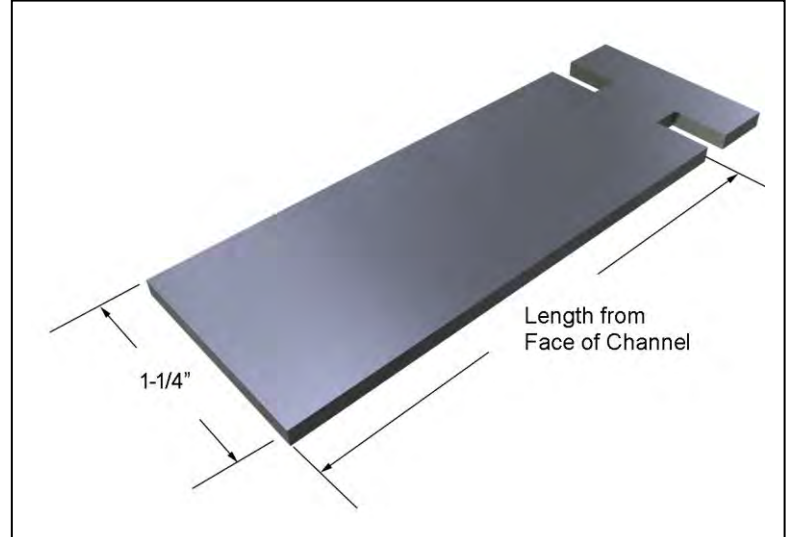

**Made to Order:**

Thickness:  3/16"  1/8"  12 gage  
 14 gage  16 gage

Length from face of  
 Channel (minimum 1-1/2"): \_\_\_\_\_

Width: 1-1/4"

Finish:  Stainless type 304  Hot Dip Galvanized  
 Zinc Alloy 710 (1/8" only)

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

**Plain Carbon Steel:** ASTM A1008/A1008M  
 Structural Steel ASTM A36/A36M-08

**Firewall Anchors:** Rolled Strip Zinc Alloy 710.  
 (Firewall alloy 1/8" only)