
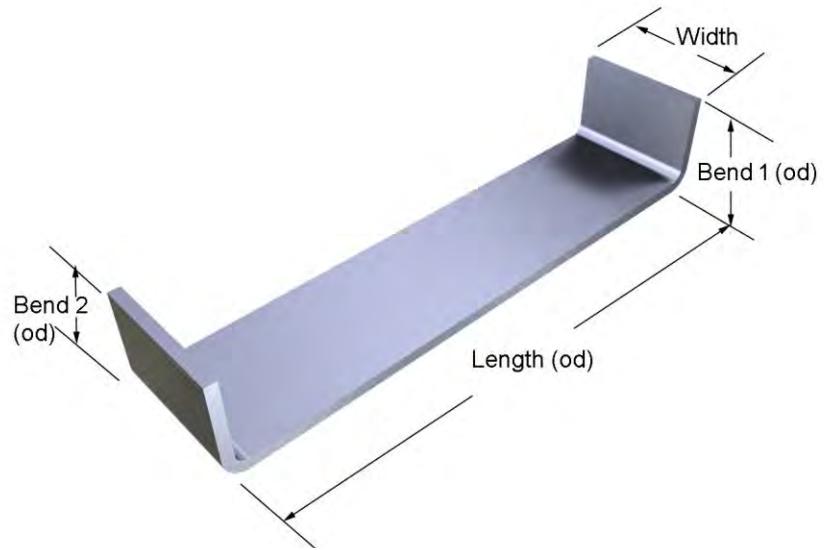


**Submittal Sheet**  
**#141 U-Type Stone Anchor**

For tying stone or CMU walls together.

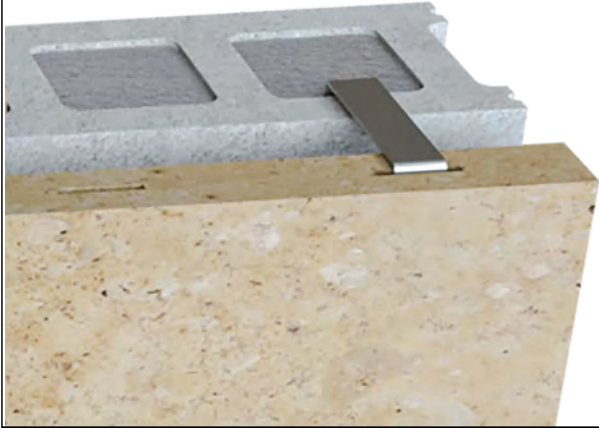

**Made to Order:**

Thickness:  3/8"  1/4"  3/16"  1/8"  
 12 gage  14 gage  16 gage

Length od: \_\_\_\_\_

Width: \_\_\_\_\_

Bend 1 (od): \_\_\_\_\_ Bend 2 (od): \_\_\_\_\_

Finish:  Stainless type 304  Hot Dip Galvanized  
 Mill Galvanized  Plain Steel  Zinc Alloy 710  
 1/8" only)

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties:  
 ASTM A 167, ASTM A 666, ASTM A  
 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2:  
 (1.50 oz/ ft<sup>2</sup>).(0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and  
 ties: ASTM A 653 G60

**Plain Carbon Steel:** ASTM A1008/A1008M  
 Structural Steel ASTM A36/A36M-08

**Firewall Anchors:** Rolled Strip Zinc Alloy 710.  
 (Firewall alloy 1/8" only)