


Used to level and plumb stone. Shims are molded from an engineered copolymer plastic material which combines high compression strength and superior load bearing surface contact characteristics.

**Physical properties:**

- Compressive Strength: 8,000 to 9,000 psi with no fracture even at 26,000 psi.
- Coefficient of linear expansion is  $3 \text{ to } 5 \times 10^{-5}$  inches/inch/ °C
- Negligible cold flow characteristics; i.e. less than 1% at 1,000 psi and 73°<sup>s</sup> F for 10,000 hrs.

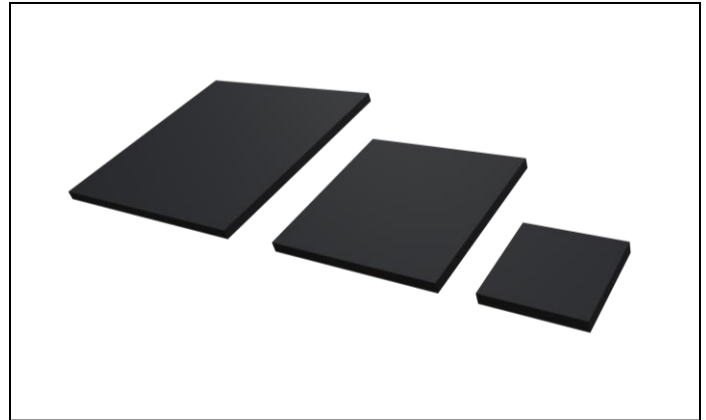

**Standards:**

	Catalog No.	Size (in.)	Thickness (in.)
<input type="checkbox"/>	185P116	1" x 1"	1/16
<input type="checkbox"/>	185P13	1" x 1"	3/8
<input type="checkbox"/>	185P14	1" x 1"	1/4
<input type="checkbox"/>	185P18	1" x 1"	1/8
<input type="checkbox"/>	185P216	2" x 2"	1/16
<input type="checkbox"/>	185P23	2" x 2"	3/8
<input type="checkbox"/>	185P24	2" x 2"	1/4
<input type="checkbox"/>	185P28	2" x 2"	1/8
<input type="checkbox"/>	185P316	3" x 3"	1/16
<input type="checkbox"/>	185P33	3" x 3"	3/8
<input type="checkbox"/>	185P34	3" x 3"	1/4
<input type="checkbox"/>	185P38	3" x 3"	1/8

Quantity: \_\_\_\_\_