
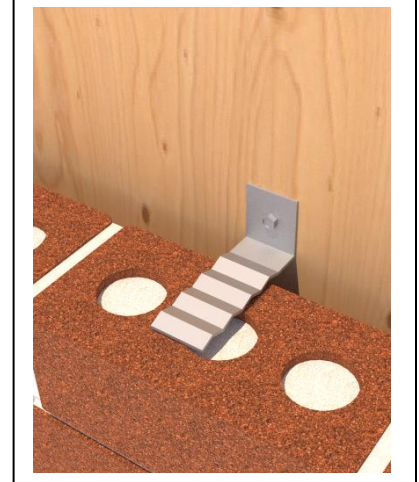


Submittal Sheet
#187 Hole-Type Brick Veneer Anchor

Used for Brick veneer walls with wood frame or CMU backups and airspaces over 1".

The #187 has a 5/16" diameter hole in the bend. (See #186 for shot type and #188 for Keyhole type)

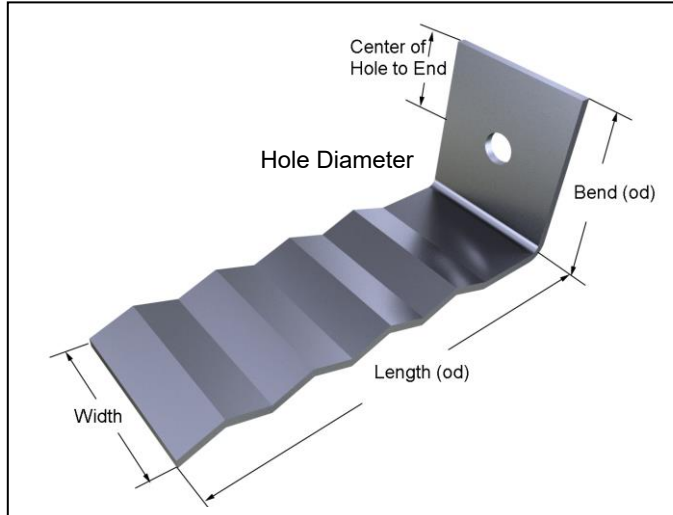

Standards:

Thickness: 16 gage 5/16" diameter hole
 Bend: 1-1/2" Width: 1-1/4"

Length: 3 1/2" 5 1/2"

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Zinc Alloy 710

Specials:

Thickness: 3/16" 1/8" 12 gage 14 gage 16 gage

Length (od) : _____ Width: _____ Bend (od) _____

Centered Hole diameter: _____ Center of hole to end: _____

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Zinc Alloy 710

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Firewall Anchors: Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)