HECKMANN™ Building Products
Div. of Mechanical Plastics Corp.
110 Richards Avenue - Norwalk, CT 06854
Tel: 708-865-2403 • Fax: 708-865-2640

Submittal Sheet #197-T Twisted-Corrugated Type Column Anchor

Used to tie masonry to a vertical structural steel beam with the column flanges perpendicular to the wall. Size: 1/8" thick x 1 ¼" wide. Specify overall length of anchor and length from inside of hook to the start of the twist (usually the beam flange dimension). Twist is 1 ¾" long. Specify location and diameter of optional hole for bolting to the beam. Available in Mill Galvanized, Hotdip Galvanized, Stainless Steel and Zinc Alloy 710 for Firewall applications.

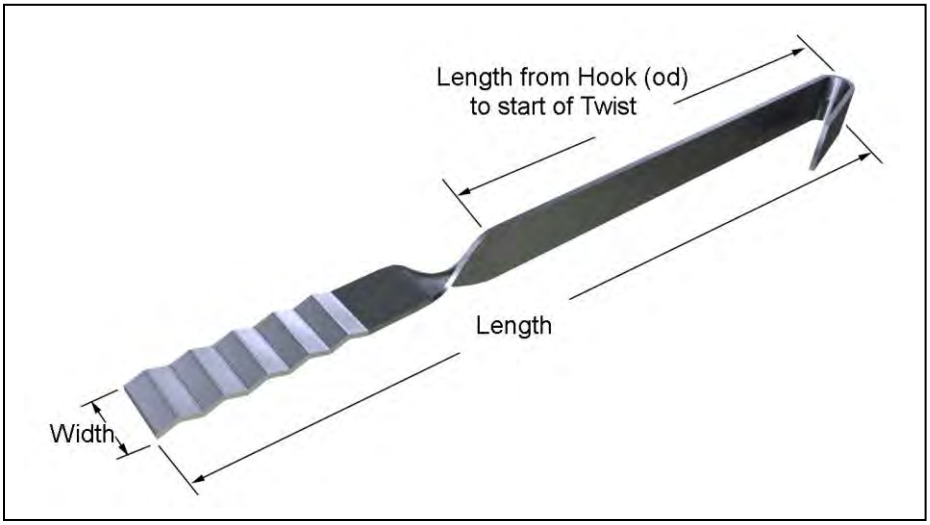

Specials:

Thickness: 1/8" Width : 1-1/4"

Overall Length (od): _____

Length from hook od to start of twist: _____

Finish: ○ Stainless type 304 ○ Mill Galvanized
○ Hotdip Galvanized
○ Zinc Alloy 710 Firewall (1/8" only)

Quantity (pcs): _____

Print Reset Form

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
Wire ties and anchors: ASTM A 580 AISI Type 304
(AISI Type 316 available upon request)
Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
Wire: ASTM A 641 (0.1 oz/ ft^2.)
Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft2.)(0.46kg/m2)
Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
Firewall Anchors: Rolled Strip Zinc Alloy 710. (1/8" only)