


Submittal Sheet
#197 Corrugated-Type Column Anchor

Used to tie masonry to a horizontal structural steel beam with the column flanges perpendicular to the wall.

Size: 1/8" thick x 1-1/4" wide. Specify overall length of anchor. Available in Mill Galvanized, Hotdip Galvanized After Fabrication, Stainless Steel and Zinc Alloy 710.

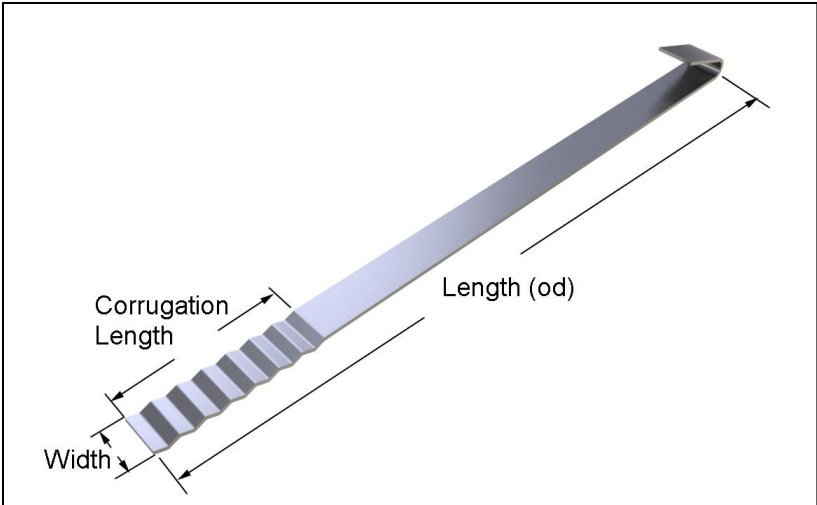

Specials:

Thickness: 1/8" Width : 1-1/4"

Overall Length (od): _____

Corrugation Length: _____

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Zinc Alloy 710

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
 Wire ties and anchors: ASTM A 580 AISI Type 304
 (AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
 Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
 Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

Firewall Anchors: Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)