


Submittal Sheet
#260 Corrugated Wall Tie

Used for anchoring brick veneer to wood stud backups with a maximum airspace of 1". Attach to wood studs or framing with a corrosion-resistant 8d common nail or fastener with equivalent or greater pullout. Check code requirements for seismic zones. The #260 Corrugated Wall Tie can only be used with wood backups per the masonry code. Fastener must be within 1/2" of the 90° bend in the anchor.

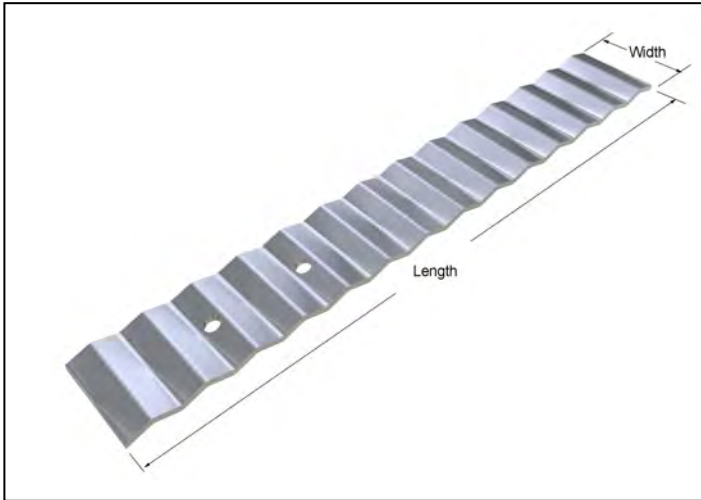

Standard Special

Standards:

Thickness: 16 gage 22 gage

Length: 7" Width: 7/8"

Finish: Stainless Steel Hot Dip Galvanized

Specials:

Thickness: 16 gage 18 gage 20 gage 22 gage

Length: _____ Width: _____

Finish: Stainless type 304 Mill Galvanized

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08