
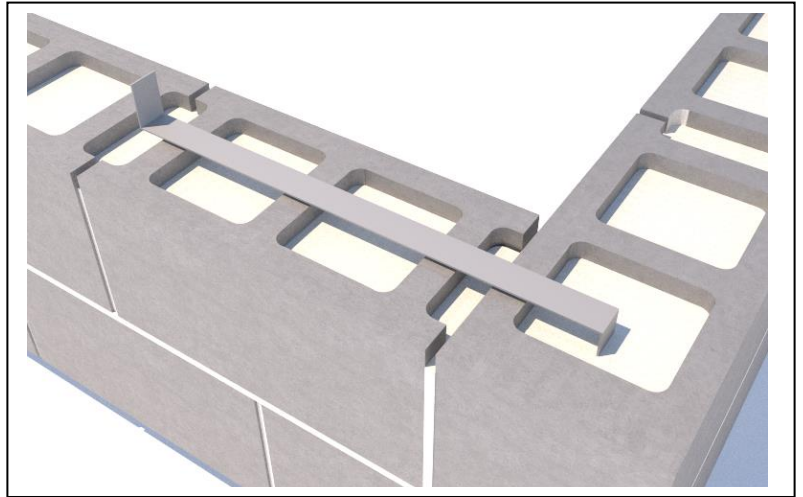


Submittal Sheet
#272 Z-Type Rigid Steel Anchor

Used for connecting intersection load-bearing CMU walls. Code requires placement every 4ft vertically and the cells must be grouted. **Use #140 Z-Type Stone Anchor for custom sizes.**

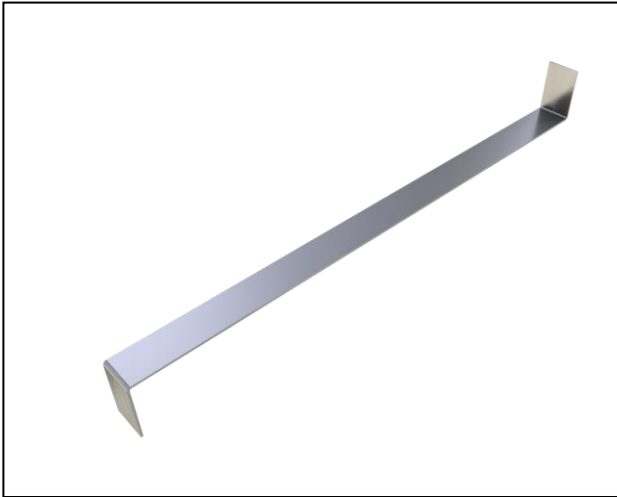

Standards:

Thickness: 1/4" Width: 1 1/2" Length (od): 24"

Bends (od): 2"

Finish: Hot Dip Galvanized

Specials:

Use #140 Z-Type Stone Anchor for custom sizes.

Quantity: _____

Material Specifications

Hotdip Galvanized: ASTM A 153 Class B-2:
(1.50 oz/ ft²)(0.46kg/m²)

Plain Carbon Steel: ASTM A1008/A1008M
Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths
80,000 psi Yield Point 70,000 psi