

Submittal Sheet

#278 Welded Plate-Strap Stone Anchor

MADE TO ORDER


Thickness: 3/8", 1/4", 3/16", 1/8", 11 gage, 12 gage, & 16 gage.

Strap Width: 1-1/4" minimum recommended.

Length: Specify length as the outside dimensions between the bend and plate.

Bend with Hole: 1" minimum recommended. You should consider the overall length of the anchor and the height of the bend to make sure there is enough room for the installer to get the screw and tool in place without interference from the welded plate. Hole should be minimum of 1/16" larger than your screw size. (3/8" screw will use a 7/16" diameter hole).

Plate: Specify plate size (width and length). Unless noted, plate will be welded in center of height dimension.

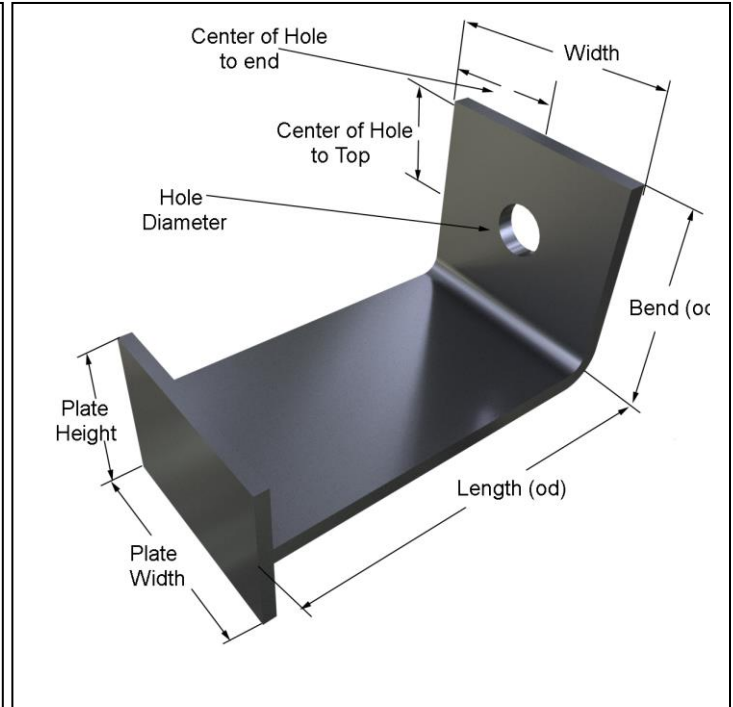

Specials:

Thickness: 3/8" 1/4" 3/16" 1/8"
 12 gage 14 gage 16 gage

Length (od): _____ Width: _____

Bend with Hole (od): _____

Hole Diameter: _____

Center of Hole to Top: _____

Center of Hole to End: _____

Welded Plate: Width: _____ Height: _____

Finish: Stainless type 304 Hot Dip Galvanized

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08