

**Submittal Sheet
 #284 Adjustable
 Slotted Stone Anchor**

MADE TO ORDER

Used for anchoring stone to backups.


Thickness: 3/8", 1/4", 3/16", 1/8", 11 gage, 12 gage, & 14 gage.

Strap Width: 2-1/2" minimum recommended.

Length: Specify length as the outside dimension of the bend with the slot.

Bend with Holes: 1" minimum recommended. Specify outside dimension and the diameter and location of holes in the bend.

Available in Stainless Steel, or Hotdip Galvanized After Fabrication. Stainless Steel recommended for any exterior stone application.

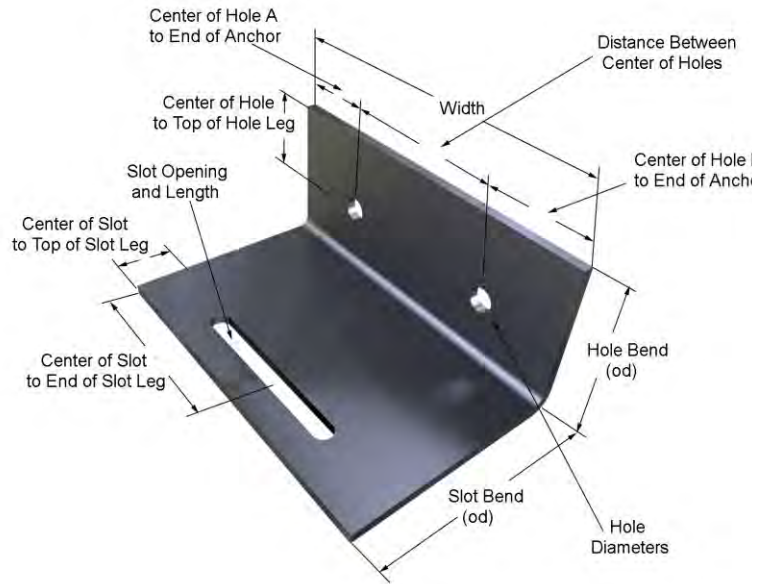

Thickness: 3/8" 1/4" 3/16" 1/8"
 12 gage 14 gage

Slot Bend (od): _____ Hole Bend (od): _____

Width: _____ Hole Diameters: _____

Center of Hole A to Anchor End: _____

Center of Hole B to Anchor End: _____

Distance Between Center of Holes: _____

Center of Hole to Top of Hole Leg: _____

Slot opening and length: _____

Center of Slot to Top of Slot Leg: _____

Center of Slot to End of Slot Leg: _____

Finish: Stainless type 304 Hot Dip Galvanized

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²)(0.46kg/m²)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

If more than 2 holes or different configurations, please provide a more detailed sketch.