


Submittal Sheet
#315-C Screw-On Anchor Strap

Strap is attached to backup through 1/4" diameter holes allowing vertical placement of wire tie to go into masonry joints. Strap can also be welded to a steel beam.

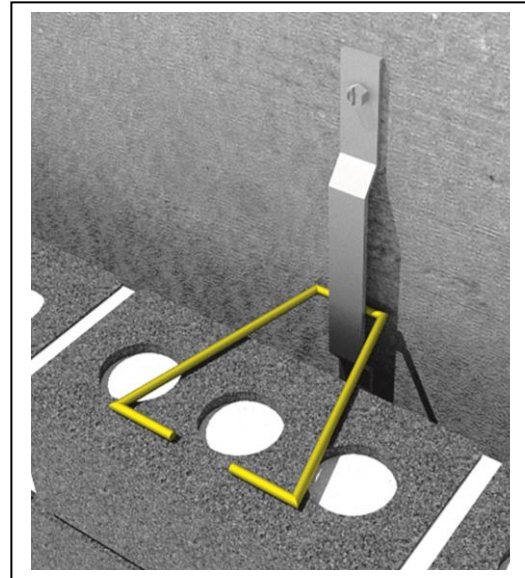

Standards:

Thickness: 12 gage

Short: Length: 6 1/2" Width: 7/8"
 (vertical adjustment is 2-1/2")

Finish: Hot Dip Galvanized Mill Galvanized
 Plain Steel Stainless Steel

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties:
 ASTM A 167, ASTM A 666, ASTM A
 240/A240M AISI Type 304.

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2:
 (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and
 ties: ASTM A 653 G60

Plain Carbon Steel: ASTM A1008/A1008M
 Structural Steel ASTM A36/A36M-08