


Submittal Sheet  
#315-D Screw-On Anchor Plate

Used as an adjustable anchor for attaching brick veneer to a solid backup wall or one with Gypsum Sheathing or Plywood. This is not for use with polyiso insulation or mineral wool.



Shown with #316 Triangle Wire Tie

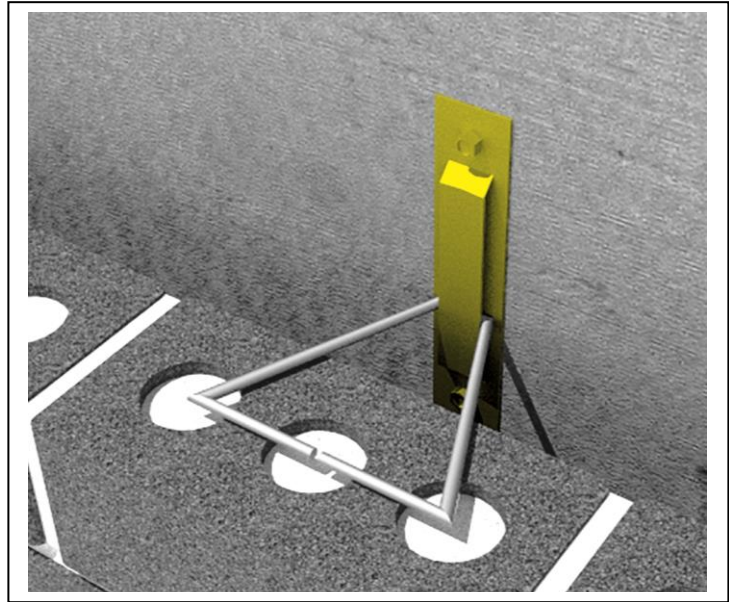

**Standards:**

Thickness:  12 gage  14 gage

Length: 6" Width: 1 1/4"

Finish:  Stainless type 304  Hot Dip Galvanized  
 Mill Galvanized

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties:  
ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2:  
(1.50 oz/ ft<sup>2</sup>.) (0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi