


**Submittal Sheet**  
**#315 Weld-On Anchor Rod**

Welded to Steel Columns. Used with #316 Triangle Ties or #318 Web Ties to attach CMU or Brick to the Steel Columns.  
Offset is 3/8" and provides 4" vertical adjustment for the 9" long rod and 2-1/2" vertical adjustment for the 5" long rod.

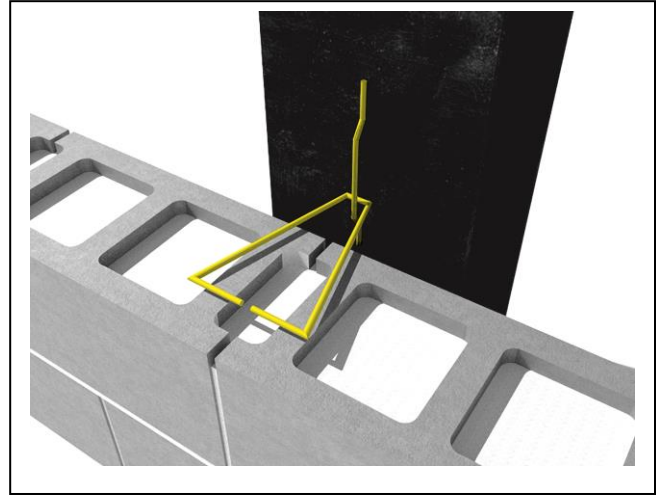

**Standards:**

Diameter: 1/4" diameter

Length:  5"  9"

Finish:  Hot Dip Galvanized  Plain Steel  
 Stainless Steel

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi