
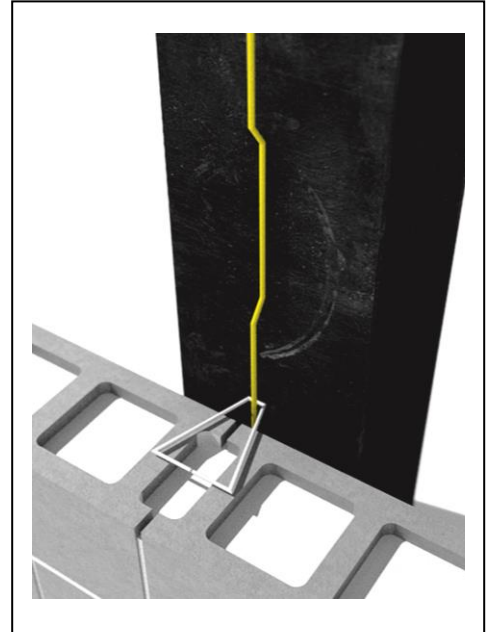


Submittal Sheet
#317 Continuous Weld-On Anchor Rod

Welded to vertical steel columns for anchoring CMU or Brick Veneer to the column.

1/4" diameter with six offsets offsets each providing 7-3/4" vertical adjustment - spaced 16-1/4" o.c.

Sold in bundles of 50 pcs.

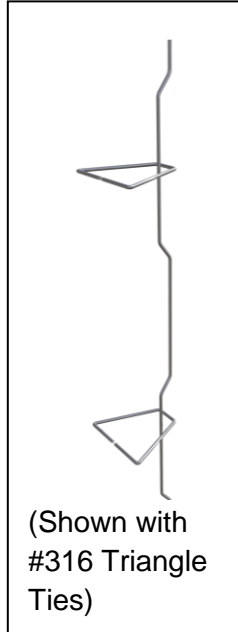

Standards:

Thickness: 1/4" diameter

Length: nominal 6 feet 8 inches – (actual 80" long)

Finish: Plain Steel Hot Dip Galvanized
 Mill Galvanized

Quantity (in pcs): _____

Material Specifications

Hotdip Galvanized: ASTM A 153 Class B-2:
(1.50 oz/ ft²)(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M
Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths
80,000 psi Yield Point 70,000 psi