
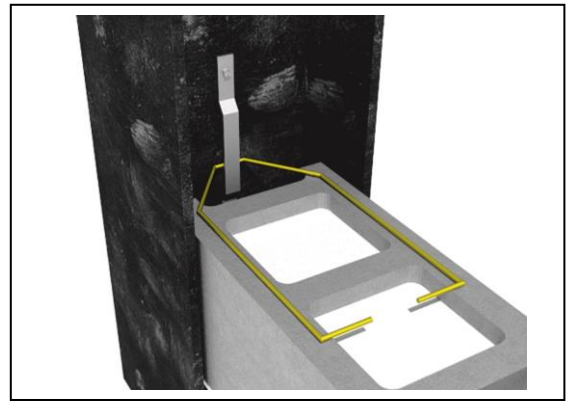


Used to attach CMU horizontally to backup walls or steel beams

Web-Ties are 12" long and are 2" less in width than the block size.

Use with #315, #315-B, #315-C anchors for backup.

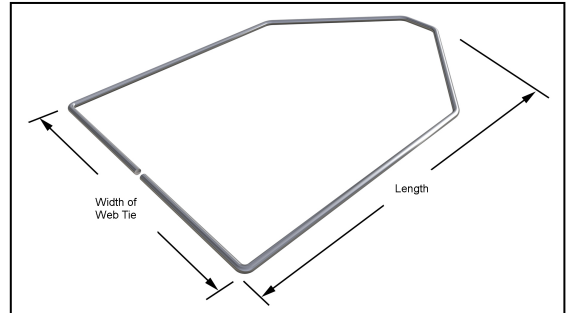

Width of Web Tie	Nominal Block Wall Thickness
2-3/8"	4"
4"	6"
6"	8"
8"	10"
10"	12"

Standard Special

Standards:

Diameter: 3/16" diameter Length: 12"

Tie Width: 2-3/8" for 4" block 4" for 6" block
 6" for 8" block 8" for 10" block 10" for 12" block

Finish: Hot Dip Galvanized Mill Galvanized

Specials:

Diameter: 3/16" diameter Length: _____

Tie Width: 2-3/8" for 4" block 4" for 6" block
 6" for 8" block 8" for 10" block 10" for 12" block

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi