


**Submittal Sheet**  
**#340-B Corrugated L-Anchor with Slot**

**Custom:**

Used for attaching masonry to various backups.  
Specify length, width, bend length, steel type and slot configuration.

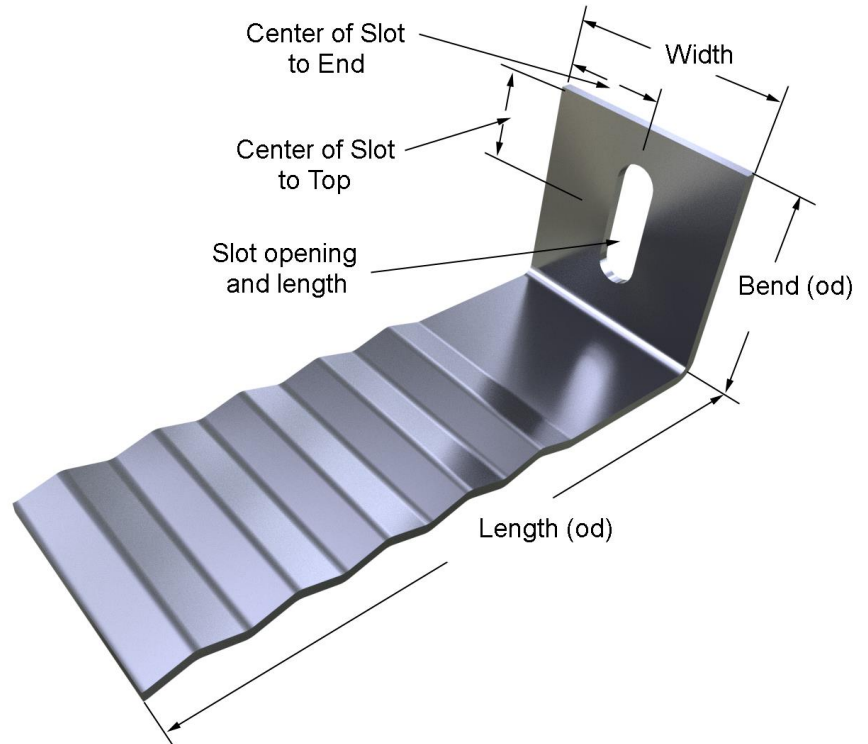

**Made to Order:**

Thickness: 1/4" 3/16" 1/8"  
12 gage 14 gage 16 gage

Length od: \_\_\_\_\_ Width: \_\_\_\_\_

Bend (od): \_\_\_\_\_

Slot Opening and Length: \_\_\_\_\_

Center of Slot to Top: \_\_\_\_\_

Center of Slot to End: \_\_\_\_\_

Finish:  Stainless type 304  Hot Dip Galvanized  
 Mill Galvanized  Zinc Alloy 710

Quantity: \_\_\_\_\_

**Material Specifications**

**Stainless Steel:** Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304 (AISI Type 316 available upon request)

**Hotdip Galvanized:** ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>.) (0.46kg/m<sup>2</sup>)

**Mill Galvanized:** Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

**Plain Carbon Steel:** ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

**Firewall Anchors:** Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" and 16 gage only)