


**Submittal Sheet
 #342-B L-Anchor
 with Two Slots**

Custom Made:

Used for attaching masonry to various backups.
 Specify length, width, bend length, steel type and slot configurations.

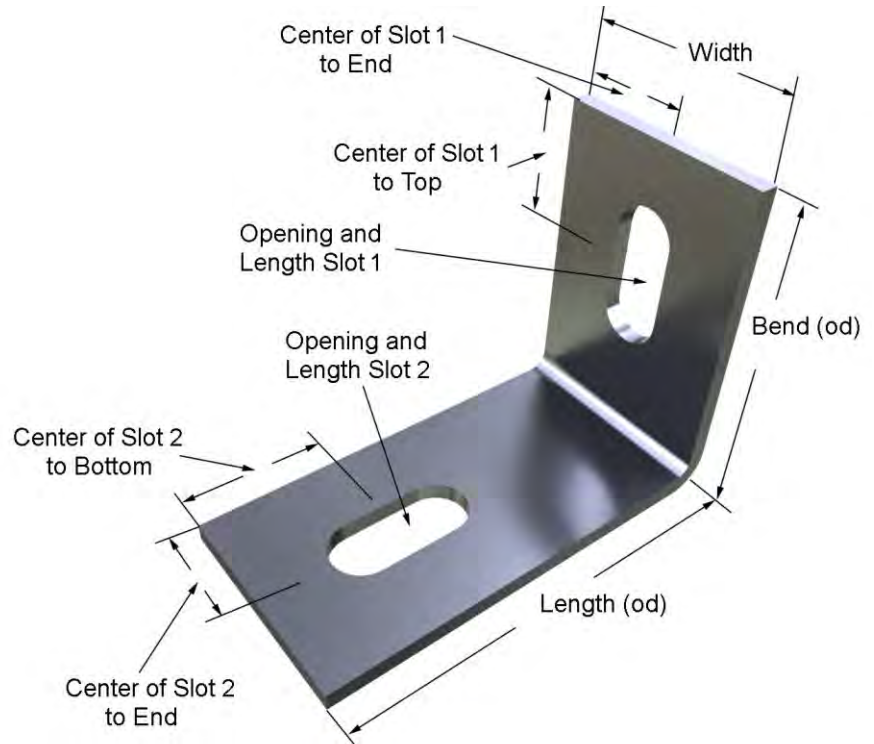

Made to Order:

Thickness: 3/8" 1/4" 3/16" 1/8"
 12 gage 14 gage 16 gage

Length od: _____ Width: _____ Bend (od): _____

Slot 1 Opening : _____ Slot 1 Length: _____

Center of Slot 1 to Top: _____ Center of Slot 1 to End: _____

Slot 2 Opening : _____ Slot 2 Length: _____

Center of Slot 2 to Bottom: _____ Center of Slot 2 to End: _____

Finish: Stainless type 304 Hot Dip Galvanized
 Mill Galvanized Zinc Alloy 710 (1/8" only)

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
 Wire ties and anchors: ASTM A 580 AISI Type 304 (AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60
 Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
 Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi

Firewall Anchors: Rolled Strip Zinc Alloy 710. (Firewall alloy 1/8" only)