




Allows for contraction and expansion of masonry walls while preventing air and water penetration. Used in masonry walls at the control joint.

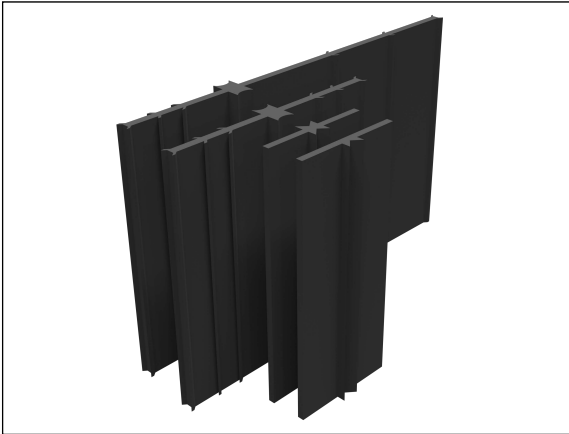


#352-14: T-Type
 2-5/8"

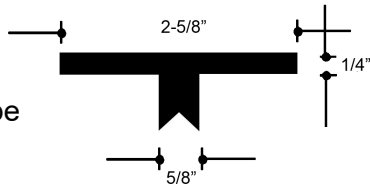


#352-13:
 11-1/8"

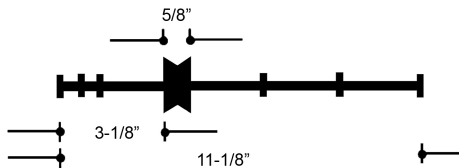

#352-12:
 6-7/8"

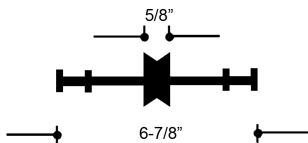

#352-11:
 2-5/8"

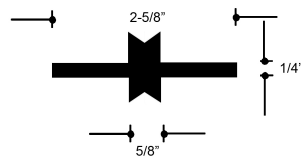

Material Specifications

Rubber Control Joints conform to ASTM D2000-18 and ASTM D2240.

Individual pieces are 48" long.
 15 pcs (60 lin ft) per box.
 Sold in full box quantities only.

Quantity (Lin. Ft): _____