



# Heckmann Building Products Inc.

1501 N. 31<sup>st</sup> Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

[www.heckmannanchors.com](http://www.heckmannanchors.com)

## SUBMITTAL SHEET:

### No. 78 WING-NUT STONE ANCHORS

#### Custom Made:

For use with the Pos-I-Tie® Wing-Nut and Thermal Pos-I-Tie® Wing-Nut systems.

#### Stainless Steel

##### Flat-Type Stone Anchors

Wing-Nut stone anchors are notched to fit in the Wing barrel holes of the Pos-I-Tie® Wing-Nut Barrel Screw system. Maximum gage is 1/8". Minimum overall width is 2". Specify Length, Width, Bend lengths.

Available in Split-Bend style (shown in pictures) straight bend or pin type.

Vertical adjustability is 1".

#### Stainless Steel:

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.


Wire ties and anchors: ASTM A 580 AISI Type 304.



1/8" x 2" wide with 1" splitbends  
Vertical adjustment 1"  
Ultimate Design Loads compression and tension

1/4" extension	160 lbs
1/2" extension	64 lbs
3/4" extension	40 lbs
1" extension	28 lbs

Installation of the Wing-Nut screw should be within 1/4" below joint to achieve the best load.

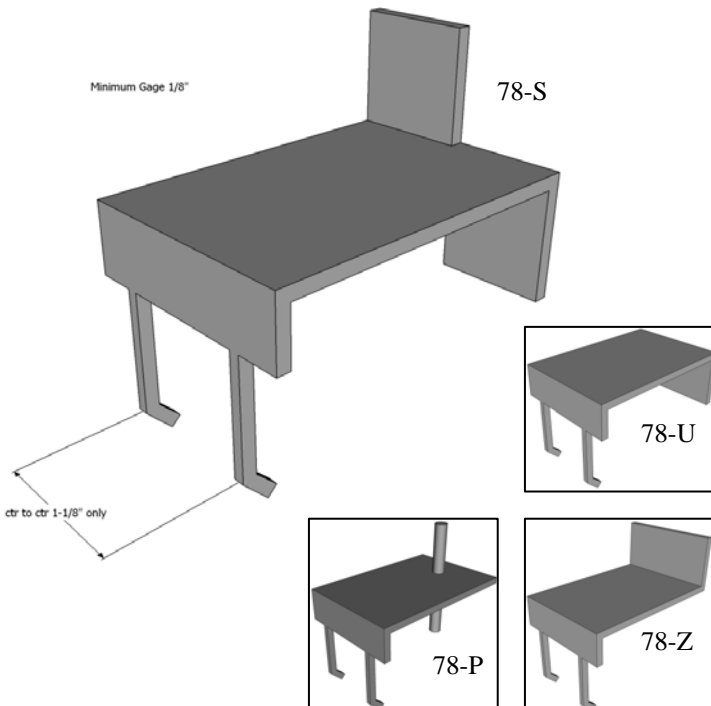

Approvals:

Comments: