



# Heckmann Building Products Inc.

1501 N. 31<sup>st</sup> Avenue

Melrose Park, IL 60160-2911

800-621-4140 or 708-865-2403 Fax: 708-865-2640

[www.heckmannanchors.com](http://www.heckmannanchors.com)

## SUBMITTAL SHEET: #260 CORRUGATED WALL TIES

Standard Sizes: 7/8" wide x 7" Long available in 16, 18, 20, and 22 gage steel in Mill Galvanized, Hotdip Galvanized After Fabrication, and Stainless Steel. 2 nail holes per piece.

Custom lengths and widths are available with 7/8" wide as minimum width and 4" long as minimum length.

Also available in 16 ounce copper.

### **Stainless Steel:**

Sheet metal anchors and ties: ASTM A 167 AISI Type 304.

ASTM A240 Type 316.

Plate and bent bar anchors: ASTM A 666 AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304.

### **Hotdip Galvanized:**

ASTM A 153 Class B-2: (1.50 oz/ ft<sup>2</sup>).(0.46kg/m<sup>2</sup>)

### **Mill Galvanized:**

Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft<sup>2</sup>.)

### **Plain Steel:**

Sheet Metal anchors and ties: ASTM A 569, ASTM A 366.


Plates, bars, and shapes: ASTM A 123, ASTM A 36.

Wire: ASTM A 82, ASTM A 82-95a.

### **Firewall Anchors:**

Rolled Strip Zinc Alloy 710.

(Firewall alloy 1/8" and 16 gage only)

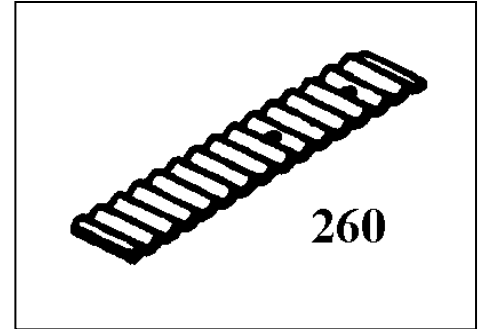

Approvals:

Comments: